

Assessment of Speckle Noise Reduction in Digital Images using Nonlinear Anisotropic Diffusion: An Experimental Investigation

Bikesh Kumar Singh*

Department of Biomedical Engineering, National Institute of Technology Raipur, G.E. Road, Raipur – 492010, Chhattisgarh, India; bsingh.bme@nitrr.ac.in

Abstract

Objectives: To investigate on choice of suitable image quality assessment techniques and effect of parameters such as gradient threshold, time step, number of iterations etc. on anisotropic diffusion filtering. **Methods/Statistical Analysis:** Various diffusivity functions and the individual contribution of associated parameters are compiled and evaluated. Edge preservation in smoothing is an important issue while filtering digital images. A recently proposed image quality metrics is used for evaluating the edge preserving ability of filters. A comparative study is carried out on the basis of experiments and their performance is tested on standard test images using 16 different image quality metrics. **Findings:** The experimental findings show that most of the true edges got lost for higher number of iterations along with more smoothening of images in techniques namely, Perona and Malik diffusion, Speckle Reducing Anisotropic Diffusion (SRAD) and Weickert anisotropic diffusion. Further, in robust anisotropic diffusion it is found that conduction coefficient plays significant role in filtering process. Higher value of conduction coefficient results in more smoothening with blurring of sharp details and edges. It is concluded that image quality measures such as universal Quality index (Q), Edge Retrieval Index (ERI) and Structural Content (SC) can give significant information about image quality even in cases where conventional image quality metrics such as Picture Signal To Noise Ratio (PSNR), Mean Square Error (MSE), Root Mean Square Error (RMSE), geometric average error (GAE), normalized absolute error (NAE) etc. fail to do so. Proposed approach can give significant information when conventional metrics fail to assess the filtered image quality. **Application/Improvements:** The behavioural characteristics of techniques studied will be suggestive when applied on real time noisy images such as ultrasound images which inherently contain speckle.

Keywords: Diffusion, Diffusivity Function, Edge Preservation, Edge Retrieval Index, Noise Filtering, Speckle

1. Introduction

Noise is a major problem in almost all imaging modalities. Noise may be introduced in images due to intrinsic artifacts, atmospheric turbulence and noisy sensors. Image filtering is an important pre-processing step in digital image processing. This paper focuses specifically on

removal of speckle noise from digital images. If ' η_s ' be the speckle noise introduced by acquisition device then the generalized model for speckle imaging¹ neglecting additive noise is given by:

$$I_n = \eta_s I_o \quad (1)$$

*Author for correspondence

where, I_o is the original noise free image, I_n is the noisy image and η_s is the multiplicative noise. Effective filtering of speckle noise while preserving object boundaries, fine details, sharp discontinuities and high resolution are major research areas in computer vision and image processing.

Linear filtering techniques like Gaussian filtering for removal of speckle noise results in blurring of edges and boundaries. Linear filters sometimes also dislocate some important image features such as edges resulting in poor resolution. To deal with the drawbacks of linear filtering techniques Perona and Malik² introduced the concept and formulation of anisotropic diffusion filtering. Anisotropic diffusion filtering has found wide number of applications in removing speckle noise from digital images including medical images such as ultrasound and MRI (Magnetic Resonance imaging) images¹⁻⁶. Diffusion algorithms use partial differential equation to denoise image. In its simplest form diffusion equation is represented as:

$$\delta I_t = \text{div}(D\nabla I) \quad (2)$$

$$I(t = 0) = I_o$$

where ‘ ∇ ’ is the gradient operator, ‘ div ’ is the divergence operator, ‘ D ’ is diffusion coefficient, ‘ I_o ’ is the initial image and I is the smoothed image at time t . In linear diffusion filtering, D is constant while in nonlinear diffusion filtering D is function of some differential characteristics of image. Representing D as function of edge gradient in Perona and Malik² diffusion, the initial image I_o is modified through anisotropic diffusion as given by:

$$\delta I_t = \text{div}(g\|\nabla I\|\nabla I) \quad (3)$$

$$I(t = 0) = I_o$$

where $g\|\nabla I\|$ is called diffusivity function. For simplicity $g\|\nabla I\|$ is represented as $g(x)$. The function $g(x)$

is usually a non-negative monotonically decreasing function approaching zero at infinity. Perona and Malik diffusion² proposed two diffusivity functions of form:

$$g(x) = \frac{1}{1 + \left(\frac{x}{\delta}\right)^2} \quad (4)$$

and,

$$g(x) = e^{-\left(\frac{x}{\delta}\right)^2} \quad (5)$$

where δ is noise threshold also called contrast param-

eter or conduction coefficient. It is usually fixed or determined by some noise parameter². The plot of diffusivity function given by equation 4 and 5 are shown in Figure 1(a) and Figure 1(b) respectively for $\delta = 8$. It can

be observed that diffusivity function is positive and monotonically decreasing.

The fall time of diffusivity function is mainly responsible for retaining sharp boundaries and edges in anisotropic diffusion filtering. Perona and Malik diffusion however suffers from stability issues and may produce false step edges⁷. Over the last years, a considerable amount of research has been carried out for understanding of mathematical properties anisotropic diffusion and its variants^{1,6-9} in both continuous and discrete form. A number of researchers have proved the ill-posedness of continuous anisotropic diffusion⁷. In¹⁰ semi implicit scheme was presented based on discrete nonlinear diffusion. Later a spatial filtering process based on discrete implementation of anisotropic diffusion was presented

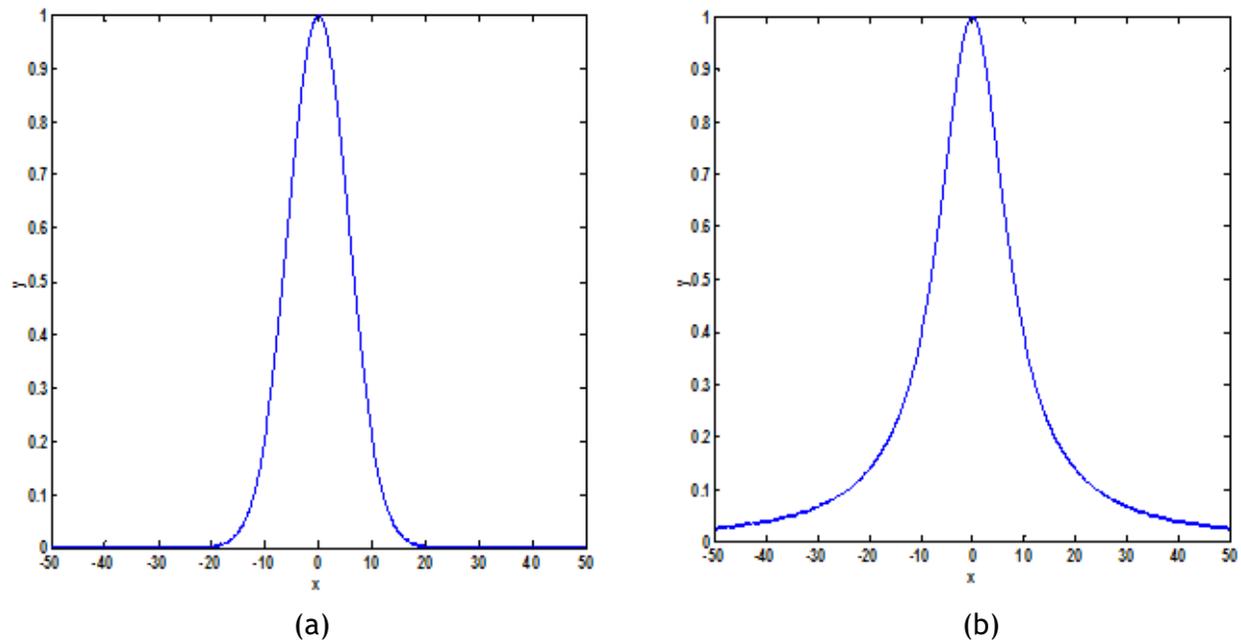


Figure 1. Plot of diffusivity functions given by equation 4 and 5 for $\delta = 8$.

Table 1. Anisotropic diffusion filters and their important parameters

Name of filter	Important parameters
Perona and Malik anisotropic diffusion ²	Number of iterations, Conduction coefficient and lambda (λ) for stability
Speckle reducing anisotropic diffusion ⁸	Number of iterations and time step
Weickert diffusivity function ¹⁰	Conduction coefficient (δ) or contrast parameter, m to define speed of diffusivity, constant C_m , no of iterations, space regularization parameter, sigma and time step (stability factor)
Robust anisotropic diffusion ⁶	Conduction coefficient δ to determine contrast parameter, stability factor, no of iterations

in¹¹. New diffusivity functions were proposed and experimented in^{6,8}. In⁸ anisotropic diffusion was combined with Lee¹² and frost filter¹³. Relation between local directional variance and local geometry of image was reported in¹ which matrix anisotropic diffusion for filtering across the image contours and in principal curvature directions was proposed. In¹⁴ relation between anisotropic diffusion and adaptive smoothing was studied.

Table 1 shows most commonly used anisotropic diffusion filters which are investigated in this work along with important parameters which affect the performance of filter. In anisotropic diffusion appropriate choice of diffusivity function and other filter specifications is extremely important for preserving edges, boundaries and detailed structures. Further they play critical role in performance of anisotropic diffusion filtering. In this work choice of suitable image quality assessment techniques and filter specifications such as gradient threshold, time step, number of iterations etc., for appropriate diffusion is investigated. Effect of each associated parameter on performance of filter is studied. Further a new image quality

metrics is proposed for evaluating and comparing various techniques.

The rest of the paper is organized as follows. In Section 2 data used and methodology adopted are explained along with various image quality evaluation metrics used for evaluating the filters performance. Section 3 presents results and discussion followed by conclusion and future directions in Section 4.

2. Materials and Methods

Experiments were conducted on 25 noise free digital images available in MATLAB® image processing toolbox. Speckle noise was later added to these images using MATLAB® software. Figure 2 shows three images from database and Figure 3 shows corresponding images after adding speckle noise to them. The noisy images were subjected to filters discussed in section two and contribution of various filter parameters on filters performance was studied and evaluated by computing thirteen image

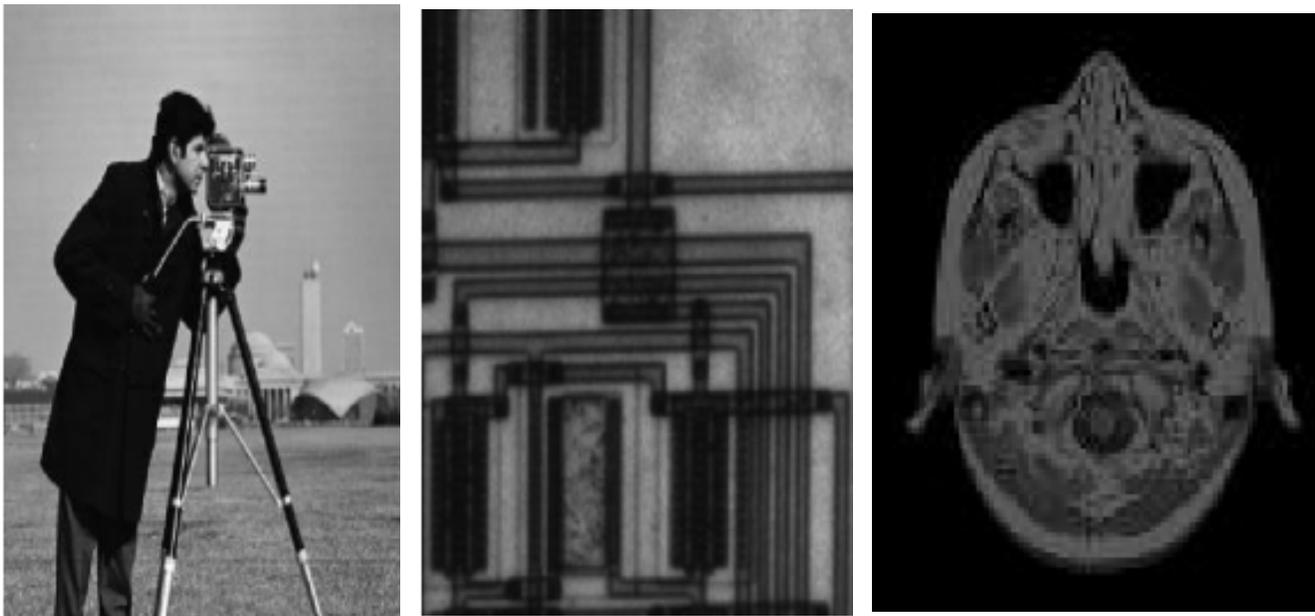


Figure 2. Original noise free images.

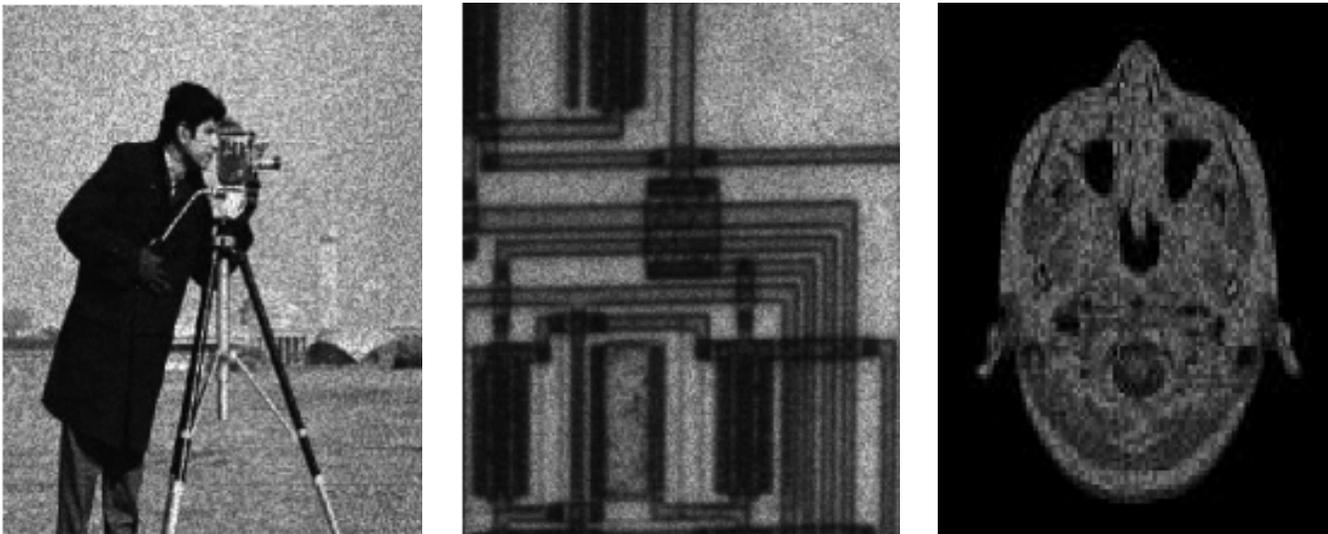


Figure 3. Images corrupted by speckle noise.

quality metrics as discussed below. Finally to evaluate the average performance mean of each image quality metrics was calculated.

The performance of various filtering techniques can be evaluated by computing the difference between original image and filtered image. One of the major objectives of any filtering technique is to minimize blurring of edges and boundaries and retain important image features such as edges resulting in good resolution. To evaluate the edge retrieval capability of various techniques, a new quality metric proposed recently in¹⁵ called 'Edge Retrieval Index' (ERI) is used. It is defined as the ability of the filter to retain sharp edges and boundaries in filtered image as that in original noise free image. Its value approaches maximum to 1 for best transformation and minimum to 0 for worst transformation.

Assuming that the original noise free image is represented by $I(i, j)$ and filtered image is represented by $F(i, j)$ then ERI is calculated using following algorithm.

Step.1: Number of edges in $I(i, j)$ is calculated using any standard edge detector like Canny, Prewitt, Sobel

etc. In our work we have used Canny edge detector¹⁶ with standard deviation of 0.4. Number of edges of $I(i, j)$ is denoted by n_i .

Step.2: Step one is repeated for filtered image $F(i, j)$ using same edge detector. Number of edges of $I(i, j)$ is denoted by n_o .

Step.3: ERI is then computed using:

$$ERI = 1 - \frac{n_i - n_s}{n_i} \quad (6)$$

where n_s is number of edges which are present both in $I(i, j)$ and $F(i, j)$ at similar pixel locations. It is calculated by comparing edges of $I(i, j)$ and $F(i, j)$.

The algorithm is illustrated in Figure 4. Figure 4(a) shows the original image $I(i, j)$ and figure 4(b) shows its edges. Figure 4(b) is used to calculate n_i . Figure 4(c)

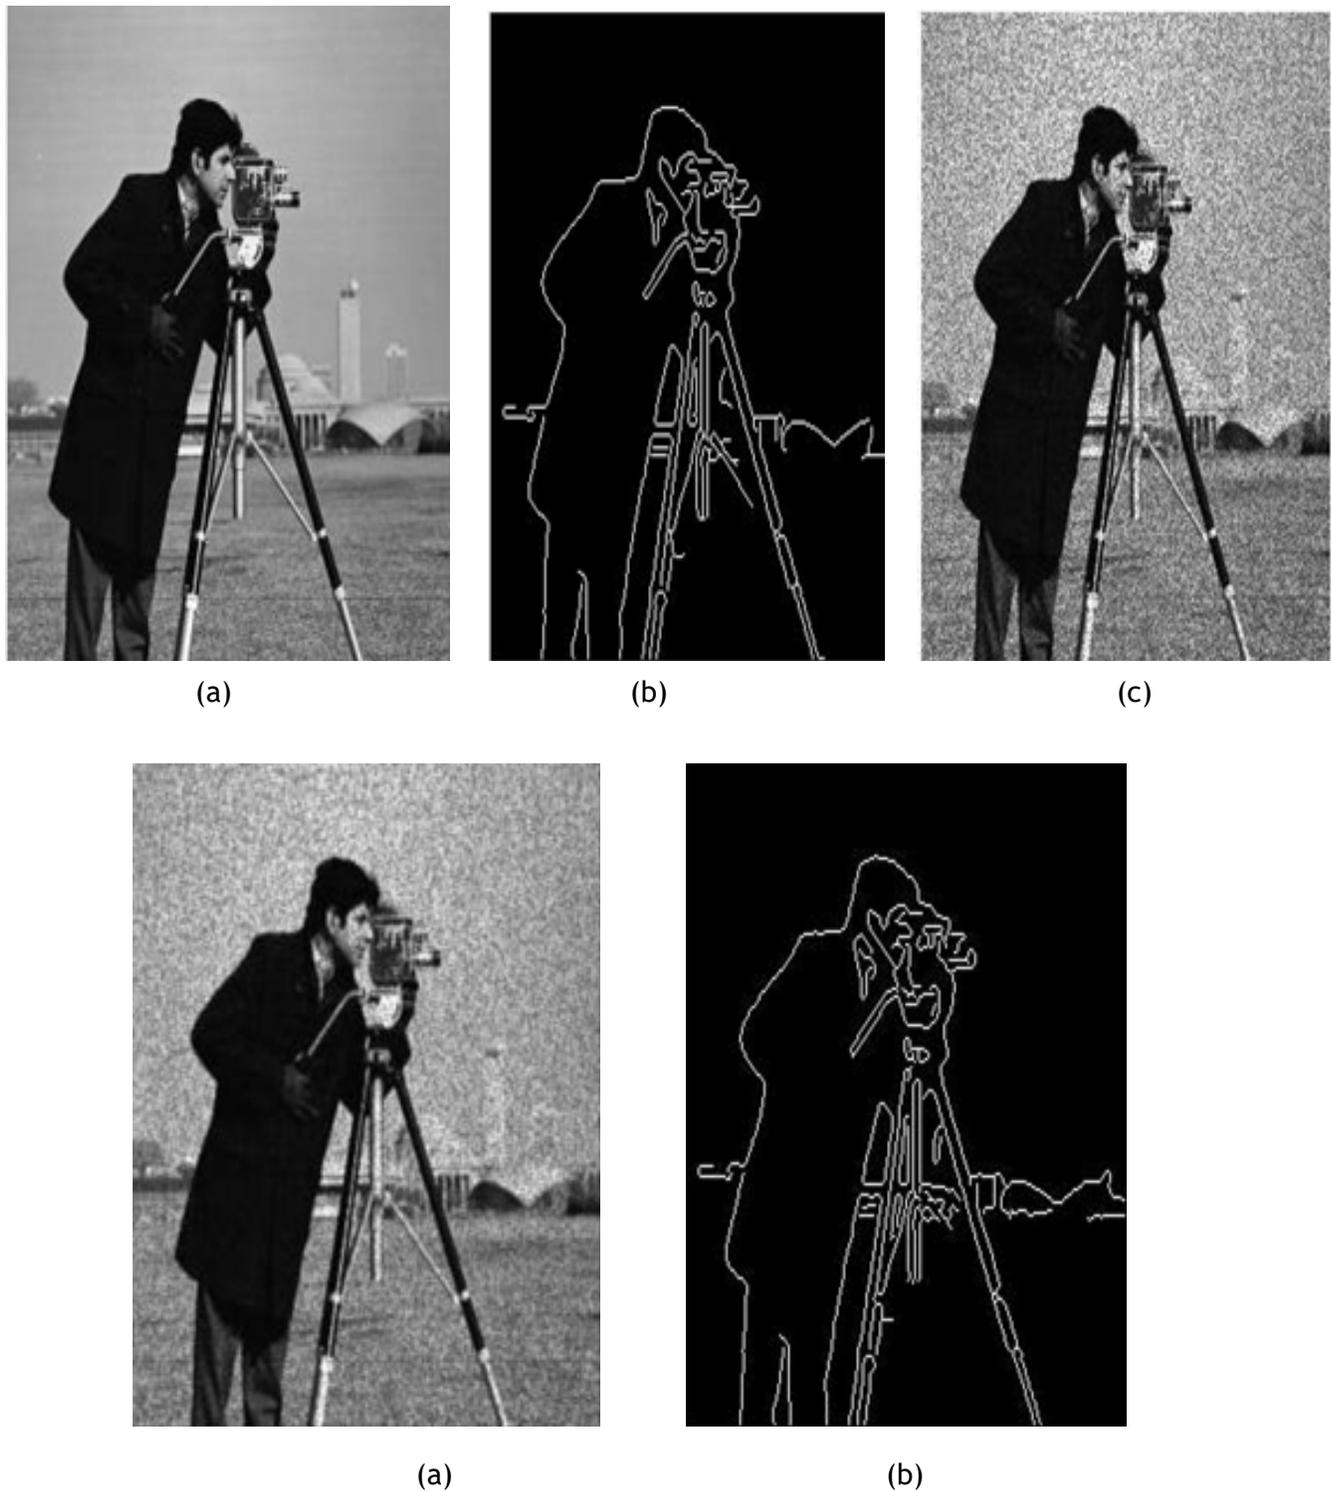


Figure 4. (a) Original image (top left). (b) Edges of original image obtained using Canny edge detector with $\sigma = 0.4$ (top middle). (c) Image after adding speckle noise (top right). (d) Image obtained after filtering (bottom left). (e) Edges of filtered image obtained using Canny edge detector with $\sigma = 0.4$ (bottom right).

shows the noisy image after adding speckle noise to $I(i, j)$. Figure 4(d) shows the filtered image $F(i, j)$ using Peronal and Malik anisotropic diffusion and Figure 4(e) shows its edges. Now ERI is computed using step 3.

Following additional image quality metric were used for evaluating the performance of filters^{3,7,9,17-21}:

1. Geometric Average Error (GAE) is defined as-

$$\text{GAE} = \left[\prod_{i=1}^M \prod_{j=1}^N \sqrt{|I(i, j) - F(i, j)|} \right]^{\frac{1}{MN}} \quad (7)$$

Value of GAE approaches zero for very good transformation.

2. Mean Square Error (MSE) and Root Mean Square Error (RMSE): MSE is given by-

$$\text{MSE} = \frac{1}{MN} \sum_{i=1}^M \sum_{j=1}^N (I(i, j) - F(i, j))^2 \quad (8)$$

and $\text{RMSE} = \sqrt{\text{MSE}}$. Low value of RMSE and MSE is desired for good transformation.

3. Signal to Noise Ratio (SNR) is computed using the following formula-

$$\text{SNR} = 10 \log_{10} \frac{\sum_{i=1}^M \sum_{j=1}^N (I_{i,j}^2 + F_{i,j}^2)}{\sum_{i=1}^M \sum_{j=1}^N (I_{i,j}^2 - F_{i,j}^2)} \quad (9)$$

4. Peak signal to noise ratio (PSNR) is calculated using-

$$\text{PSNR} = -10 \log \frac{\text{MSE}}{(I_{i,j})_{\max}^2} \quad (10)$$

where $(I_{i,j})_{\max}$ is the maximum intensity of original image $I(i, j)$. Both SNR and PSNR are higher for better transformed image. They measure the resemblance between original and filtered image.

5. The Minkowski metric is measure of dissimilarity between the original and filtered image and is defined as-

$$M_n = \left(\frac{1}{MN} \sum_{i=1}^M \sum_{j=1}^N |I(i, j) - F(i, j)|^n \right)^{\frac{1}{n}} \quad (11)$$

which is computed for $n = 1$ (M_1 , also called as average difference (AD)), $n = 3$ (M_3) and $n = 4$ (M_4). Low value of M_n is desirable for good transformation.

6. Universal quality index (Q) is defined as-

$$Q = \frac{\sigma_F}{\sigma_I \sigma_F} \frac{2\overline{IF}}{(\overline{I})^2 + (\overline{F})^2} \frac{2\sigma_I \sigma_F}{\sigma_I^2 + \sigma_F^2} \quad (12)$$

where σ_{IF} is the covariance between original and filtered image windows.

\overline{I} and \overline{F} mean of intensities of original and filtered image.

σ_I and σ_F are standard deviation of original and filtered image.

The value of Q lies between -1 and 1 for bad and good transformation respectively.

7. Mean structural similarity index (MSSIN) is given by-

$$MSSIN = \frac{(2\overline{IF} + k_1)}{((\overline{I})^2 + (\overline{F})^2 + k_1)} \frac{(2\sigma_{IF} + k_2)}{(\sigma_I^2 + \sigma_F^2 + k_2)} \quad (13)$$

where $k_1 = 0.01d_r$, $k_2 = 0.01d_r$ and d_r is the dynamic

range of original images. MSSIN ranges between -1 and +1 for bad and good transformation respectively.

8. Structural Content (SC) is the measure of image similarity based on similar small patterns in an image. Large value of SC indicates that filtered image is of poor quality. It is calculated using following equation -

$$SC = \frac{\sum_{i=1}^M \sum_{j=1}^N (I(i, j))^2}{\sum_{i=1}^M \sum_{j=1}^N (F(i, j))^2} \quad (14)$$

9. Normalized cross correlation (NC) is the measure of similarity between two patterns. It is given by-

$$NC = \frac{\sum_{i=1}^M \sum_{j=1}^N (I(i, j) \times F(i, j))}{\sum_{i=1}^M \sum_{j=1}^N (I(i, j))^2} \quad (15)$$

Its value is high (maximum = 1) for good transformation.

10. Maximum difference (MD) is defined as -

$$MD = \max \left[|I(i, j) - F(i, j)| \right] \quad (16)$$

Its value is low for good transformation.

11. Laplacian Mean Squared Error (LMSE) is given by -

$$LMSE = \frac{\sum_{i=1}^M \sum_{j=1}^N (\nabla^2 I(i, j) - \nabla^2 F(i, j))^2}{\sum_{i=1}^M \sum_{j=1}^N (\nabla^2 I(i, j))^2} \quad (17)$$

where ∇^2 is Laplacian operator given by-

$$\nabla^2 I = \frac{[I_{i,j+1} + I_{i,j-1} + I_{i+1,j} + I_{i-1,j}] - I(i, j)}{4} \quad (18)$$

For perfect transformation LMSE = 0 otherwise it increases up to 1.

12. Normalized Absolute Error (NAE) is numerical difference between original image and filtered image. It is given by-


$$NAE = \frac{\sum_{i=1}^M \sum_{j=1}^N [|I(i, j) - F(i, j)|]}{\sum_{i=1}^M \sum_{j=1}^N (I(i, j))} \quad (19)$$

3. Results and Discussions


All the steps of filtering and associated parameters were carefully studied so that best choice among various options can be selected. Various types of anisotropic diffusion filters experimented and evaluated are-

3.1 Perona and Malik Anisotropic Diffusion


Table 2 shows values of various image quality metrics obtained after applying Perona and Malik anisotropic diffusion² with diffusivity function given by equation 4. Number of iterations is varied while keeping conduction coefficient and λ constant. It is observed that along with PSNR all other metric approximately remain constant

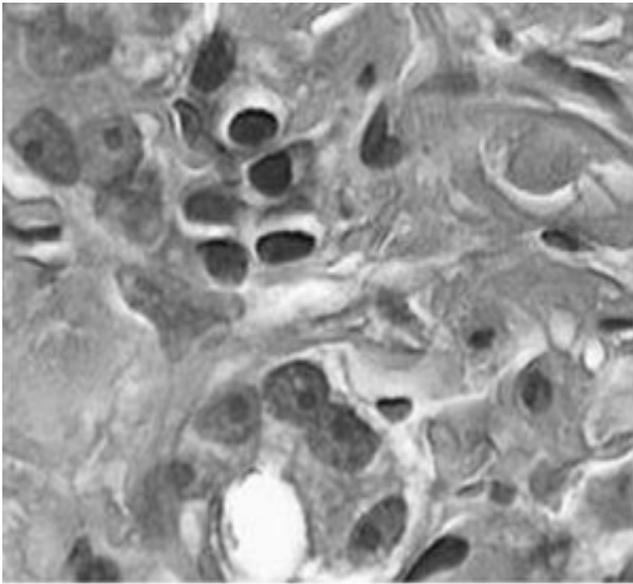


(a)

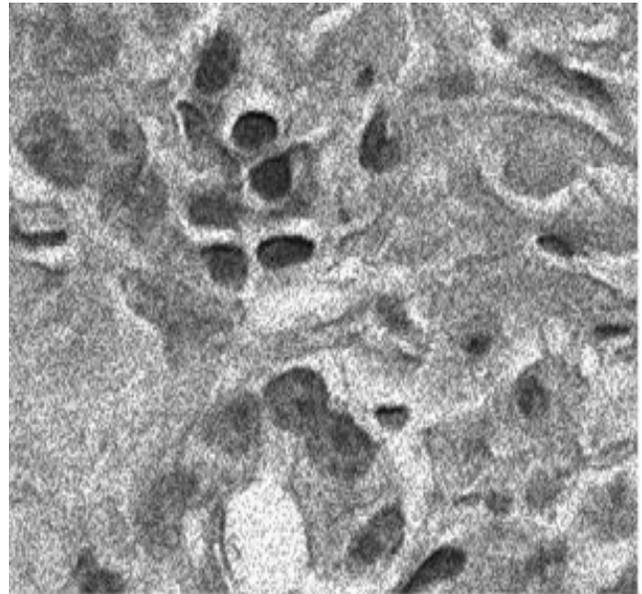

(b)

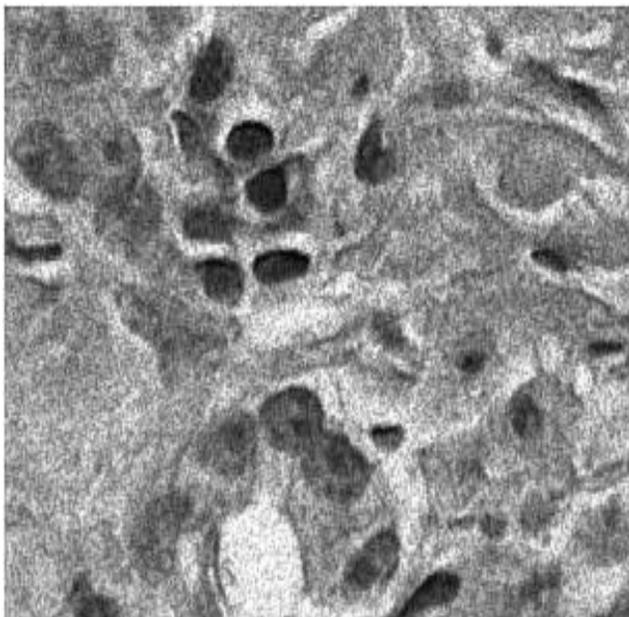

(c)

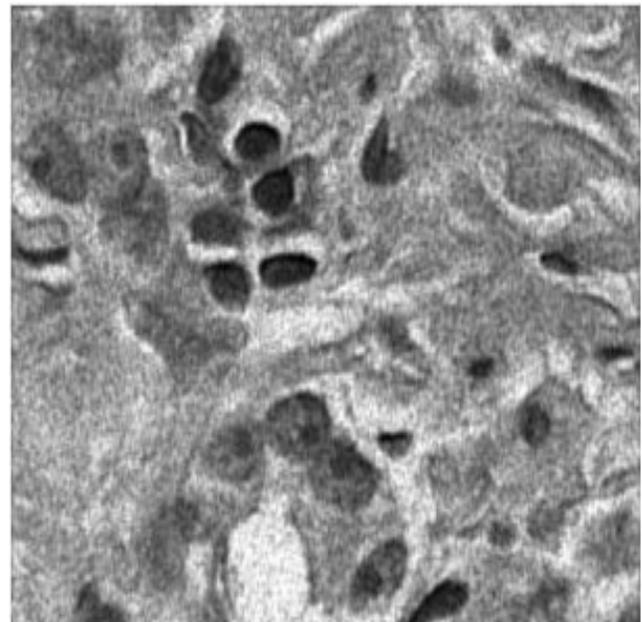

(d)

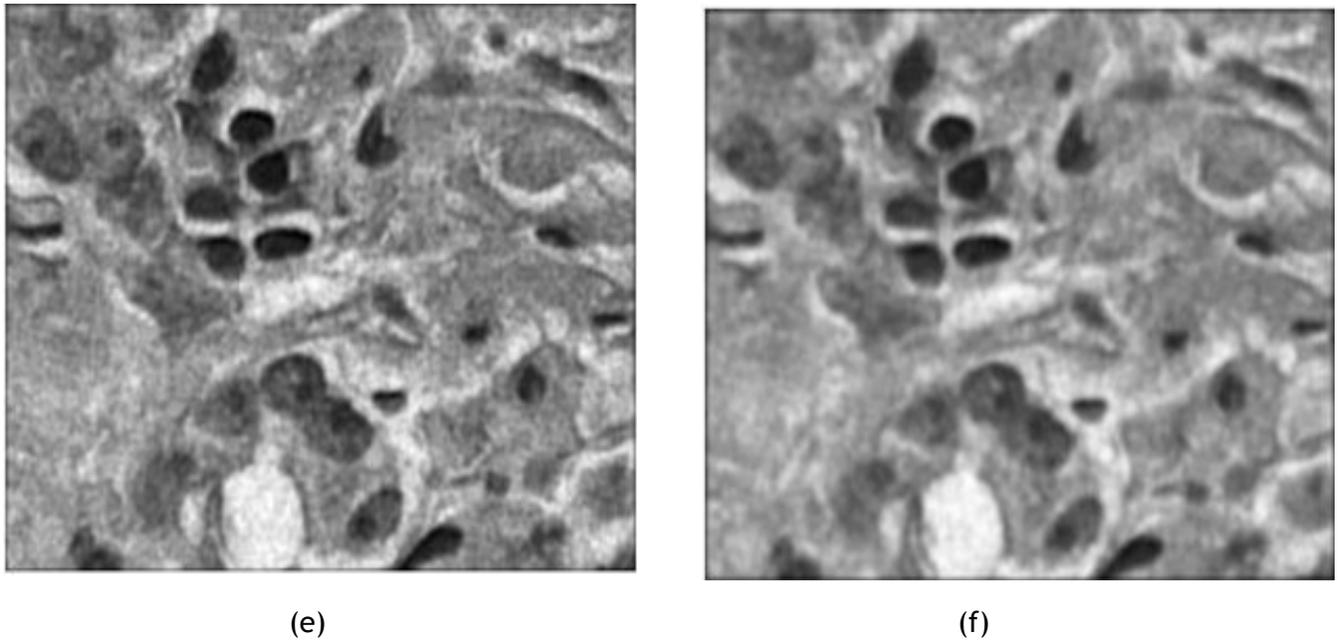


Figure 5. . (a) Original noise free image (top left). (b) Image corrupted by speckle noise (Top right). (c) Filtered image after first iteration (middle left). (d) Second iteration (middle right). (e) Fifth iteration (bottom left) and tenth iteration (bottom right).

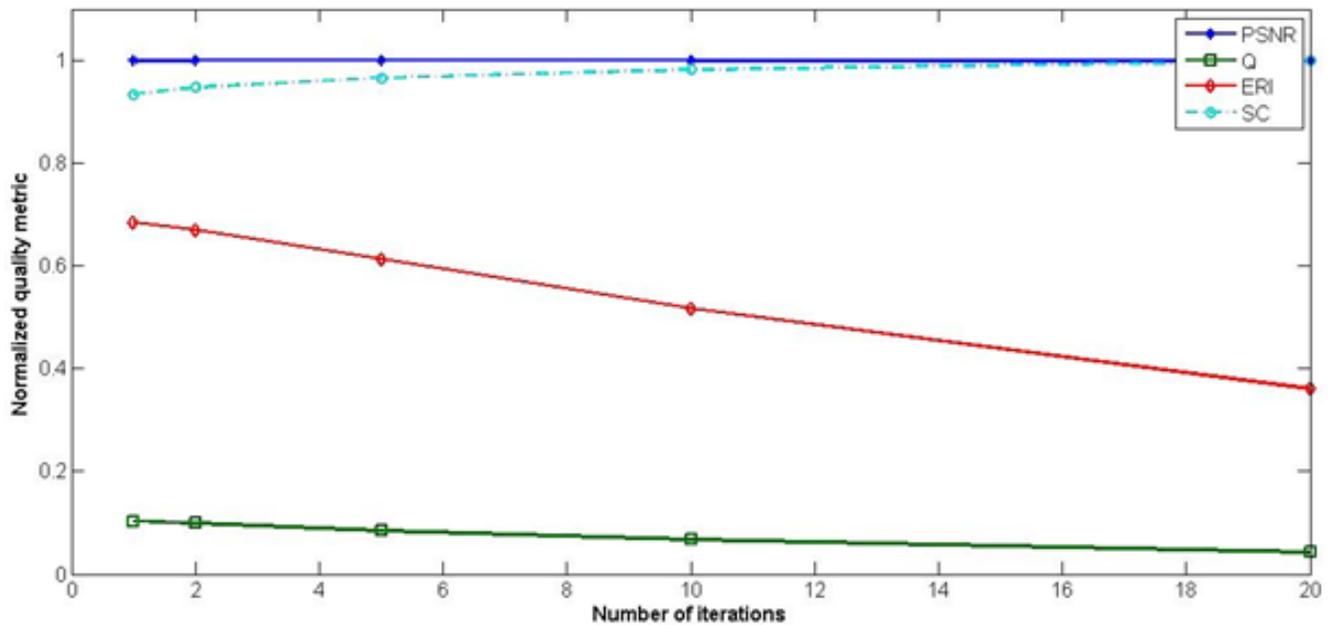


Figure 6. Effect of varying number of iterations on image quality metric.

Table 2. Effect of varying no. of iterations on performance of Perona and Malik anisotropic diffusion with diffusivity function given by Equation 3

Image quality metric	No. of iterations (conduction coefficient = 20, $\lambda = 0.2$)				
	1	2	5	10	20
GAE	0.000	0.000	0.000	0.000	0.000
MSE	15489.253	15489.824	15490.876	15491.903	15493.203
SNR	0.034	0.033	0.033	0.033	0.032
RMSE	113.219	113.221	113.225	113.229	113.234
PSNR	9.492	9.491	9.491	9.491	9.490
M3	121.164	121.167	121.173	121.179	121.186
M4	127.299	127.303	127.311	127.318	127.326
Q	0.103	0.099	0.085	0.067	0.042
MSSIN	0.146	0.146	0.146	0.146	0.146
ERI	0.685	0.670	0.614	0.517	0.361
AD	101.271	101.271	101.272	101.274	101.276
SC	65952.620	66936.588	68246.509	69320.366	70611.567
NC	0.004	0.004	0.004	0.004	0.004
MD	214.886	214.900	214.957	215.004	215.051
LMSE	0.995	0.997	0.998	0.999	1.000
NAE	0.996	0.996	0.996	0.996	0.996


Table 3. Effect of varying conduction coefficient on performance of Perona and Malik anisotropic diffusion with diffusivity function given by Equation 3

Image quality metric	Conduction coefficient (Number of iterations = 1, $\lambda = 0.2$)					
	1	20	40	60	80	100
GAE	0.000	0.000	0.000	0.000	0.000	0.000
MSE	15489.367	15489.254	15489.253	15489.253	15489.253	15489.253
SNR	0.034	0.034	0.034	0.034	0.034	0.034
RMSE	113.219	113.219	113.219	113.219	113.219	113.219
PSNR	9.492	9.492	9.492	9.492	9.492	9.492
M3	121.164	121.164	121.164	121.164	121.164	121.164
M4	127.299	127.299	127.299	127.299	127.299	127.299
Q	0.103	0.103	0.103	0.103	0.103	0.103
MSSIN	0.146	0.146	0.146	0.146	0.146	0.146
ERI	0.685	0.685	0.685	0.685	0.685	0.685
AD	101.271	101.271	101.271	101.271	101.271	101.271
SC	66061.121	65953.480	65952.620	65952.517	65952.461	65952.365
NC	0.004	0.004	0.004	0.004	0.004	0.004
MD	214.890	214.886	214.886	214.886	214.886	214.886
LMSE	0.995	0.995	0.995	0.995	0.995	0.995
NAE	0.996	0.996	0.996	0.996	0.996	0.996


except Q, ERI and SC. Figure 5 shows the original image, image corrupted by speckle noise and result of filtering using Perona and Malik (Equation (4)). It is observed that with increase in number of iterations the image becomes more smoothed there by reducing speckle noise but at the same time blurring edges and sharp details of the image. The effect of varying number of iterations on PSNR, Q, ERI and SC is shown in Figure 6. It is observed that with increase in number of iterations though PSNR remain constant, Q and ERI decreases while SC increases thereby dictating poor transformation for higher number of iterations. After studying the effect of number of iterations, the effect of conduction coefficient was analyzed. In this case λ (stability factor) and number of iterations were kept fixed. Table 3 observed that on an average, the performance of the filter remains same throughout for all the values of conduction coefficient. Now to study the effect

of variations in λ , conduction coefficient and number of iterations are fixed at 20 and 1 respectively.

Figure 7 shows the filtered images for various values of λ . It is observed that with increase in value of λ the resulting image becomes smooth and edges get blurred. The corresponding image quality evaluation metrics is shown in Table 4 and illustrated in Figure 8. Change in value of λ does not affect most of the image quality metrics including PSNR. However with increase in λ value of ERI decreases and SC increases thereby indicating blurring and loss of details in image. The results are even worst for λ greater than 0.3. Hence for satisfactory transformation using diffusivity function given by equation 3, number of iterations should be small and λ must be less than 0.3. It is also observed that when filter parameters are varied, most of the image quality metrics such as GAE, MSE, RMSE, PSNR, M3, M4, MSSIN, AD, NC, MD, LMSE, and NAE

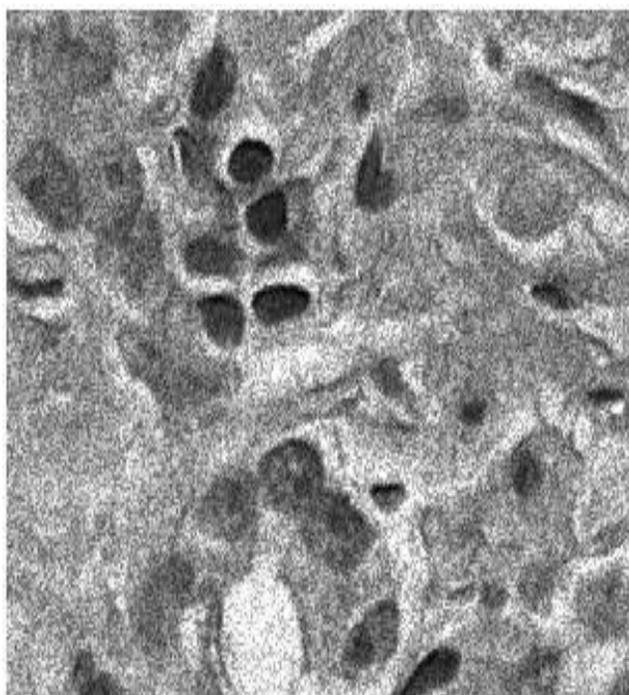

(a)

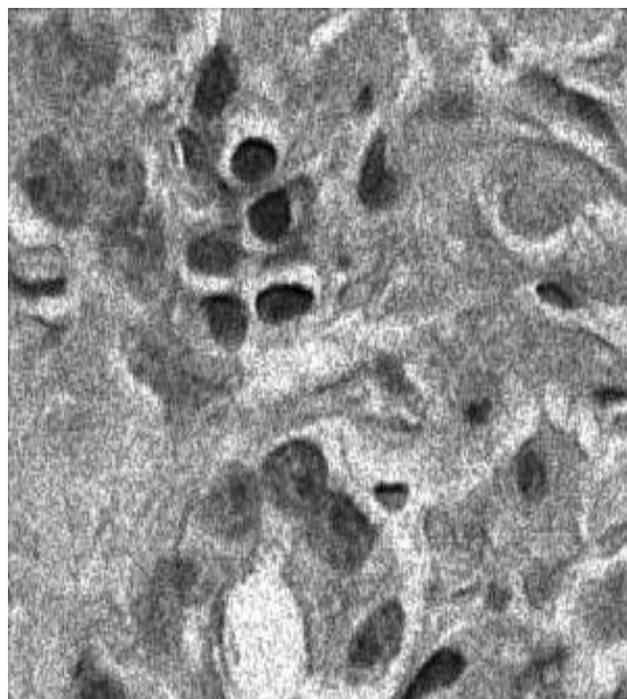

(b)

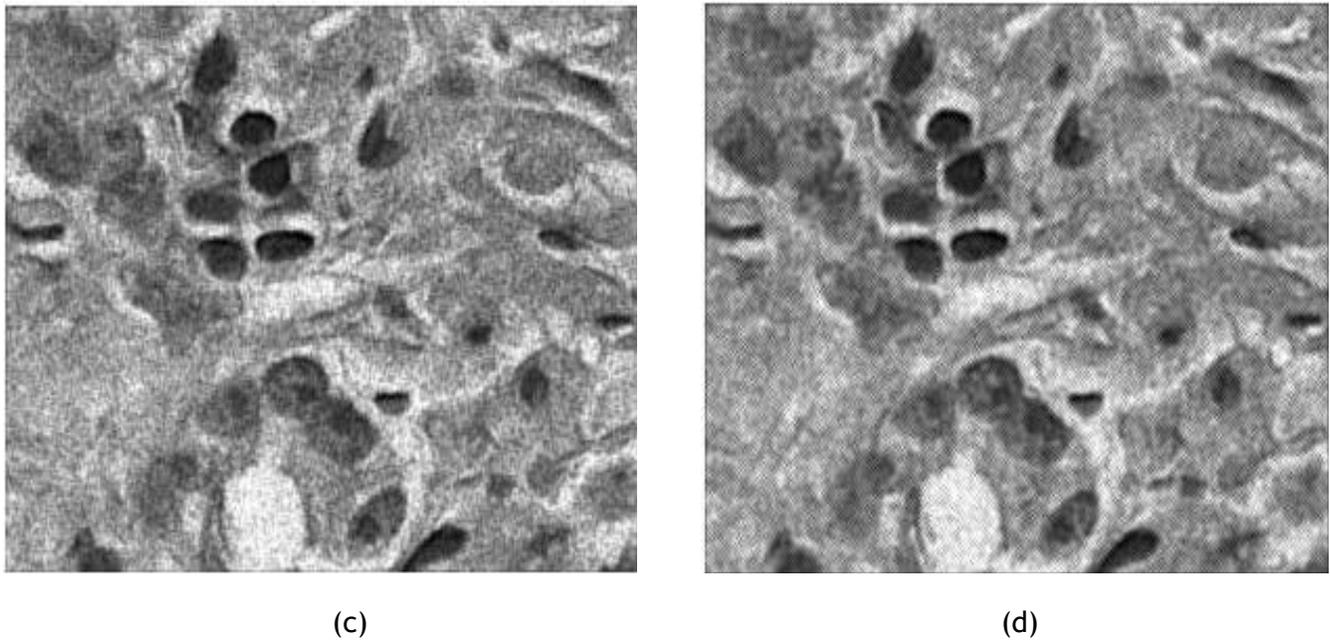


Figure 7. (a) Filtered image for $\lambda=0.1$ (top left). (b) $\lambda = 0.2$ (top right). (c) $\lambda=.3$ (bottom left). (d) $\lambda=0.5$ (bottom right).

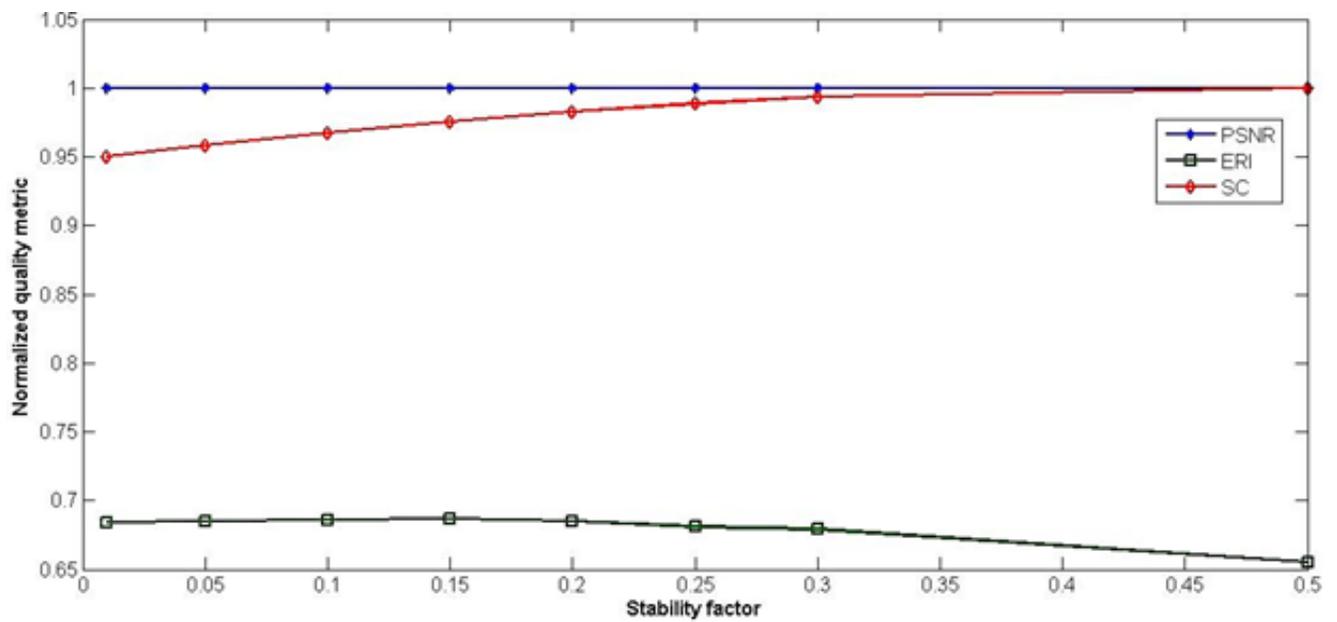


Figure 8. Effect of varying stability factor on image quality metric.

Table 4. Effect of varying λ on performance of Perona and Malik anisotropic diffusion with diffusivity function given by Equation 3

Image quality metric	λ (Number of iterations = 1, Conduction coefficient = 20)							
	0.01	0.05	0.1	0.15	0.20	0.25	0.30	0.50
GAE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
MSE	15488.438	15488.609	15488.823	15489.038	15489.253	15489.468	15489.684	15490.549
SNR	0.034	0.034	0.034	0.034	0.034	0.034	0.034	0.033
RMSE	113.216	113.216	113.217	113.218	113.219	113.219	113.220	113.223
PSNR	9.492	9.492	9.492	9.492	9.492	9.491	9.491	9.491
M3	121.159	121.160	121.161	121.162	121.164	121.165	121.166	121.172
M4	127.292	127.293	127.295	127.297	127.299	127.300	127.302	127.309

Table 4 Continued

Q	0.103	0.103	0.103	0.103	0.103	0.103	0.103	0.103	0.103	0.103
MSSIN	0.146	0.146	0.146	0.146	0.146	0.146	0.146	0.146	0.146	0.146
ERI	0.684	0.685	0.687	0.685	0.681	0.679	0.681	0.679	0.655	0.655
AD	101.270	101.270	101.271	101.271	101.271	101.271	101.271	101.271	101.272	101.272
SC	63776.662	64315.287	65478.043	65952.620	66350.824	66669.428	66350.824	66669.428	67105.747	67105.747
NC	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004
MD	214.898	214.893	214.885	214.886	214.889	214.894	214.889	214.894	214.959	214.959
LMSE	0.994	0.994	0.995	0.995	0.996	0.996	0.996	0.996	0.999	0.999
NAE	0.996	0.996	0.996	0.996	0.996	0.996	0.996	0.996	0.996	0.996

etc. remain constant. Hence ERI can be used as useful metric for evaluating filters performance.

Similar methodology is adopted for analyzing the performance of Perona and Malik anisotropic diffusion with diffusivity function given by equation 5. It was observed that with variations in filter specifications, most of the image quality metrics remain constant as in previous case. Further following observations were made:

- When numbers of iterations were increased from 1 to 20, Q and ERI decreases while SC increases thereby resulting in poor transformation.
- When conduction coefficient was increased from 1 to 100, no variations in image quality metrics were found.
- When stability factor λ was varied from 0.001 to 0.5 it was observed that most of the edges were lost for λ greater than 0.3 as depicted by ERI.

3.2 Speckle Reducing Anisotropic Diffusion

After analyzing Perona and Malik anisotropic diffusion, we analyzed another anisotropic diffusion filter called as

'Speckle Reducing Anisotropic Diffusion (SRAD) filter'⁸. SRAD is the edge-sensitive anisotropic diffusion filter for speckled images. This technique enhances edges by inhibiting diffusion across the edges and allowing diffusion on either side of edges. It is based on Minimum Mean Square Error (MMSE) approach to filtering. It is useful for reducing noise from images particularly corrupted by multiplicative noise such as speckle noise. The details of this technique can be found in⁸. Effect of two parameters on SRAD is considered in this study i.e. number of iterations and time step as mentioned in Table 1. Initially time step was fixed at 0.15 and number of iterations was varied from 1 to 100. It is found that all quality metrics except Q, ERI and SC showed no variations. With increase in number of iterations there is no significant improvement in PSNR as illustrated in Figure 9. Its value remains constant and approximately same as that of Perona and Malik diffusion. Further Q and ERI decreases while SC increases indicating loss of visual details and resolution in filtered image. Now to analyze the influence of time step on performance of SRAD, number of iterations was fixed at 1 and time step was varied from 0 to 0.5. It is observed that

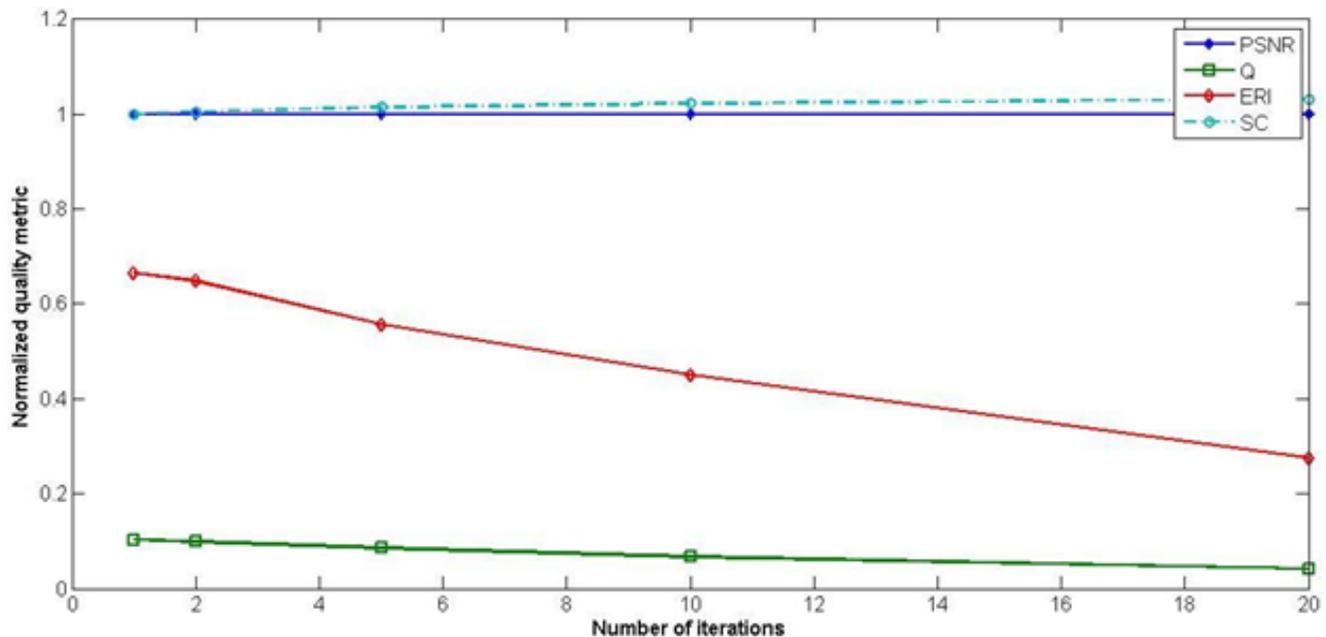


Figure 9. Effect of varying number of iterations on image quality metric in SRAD.

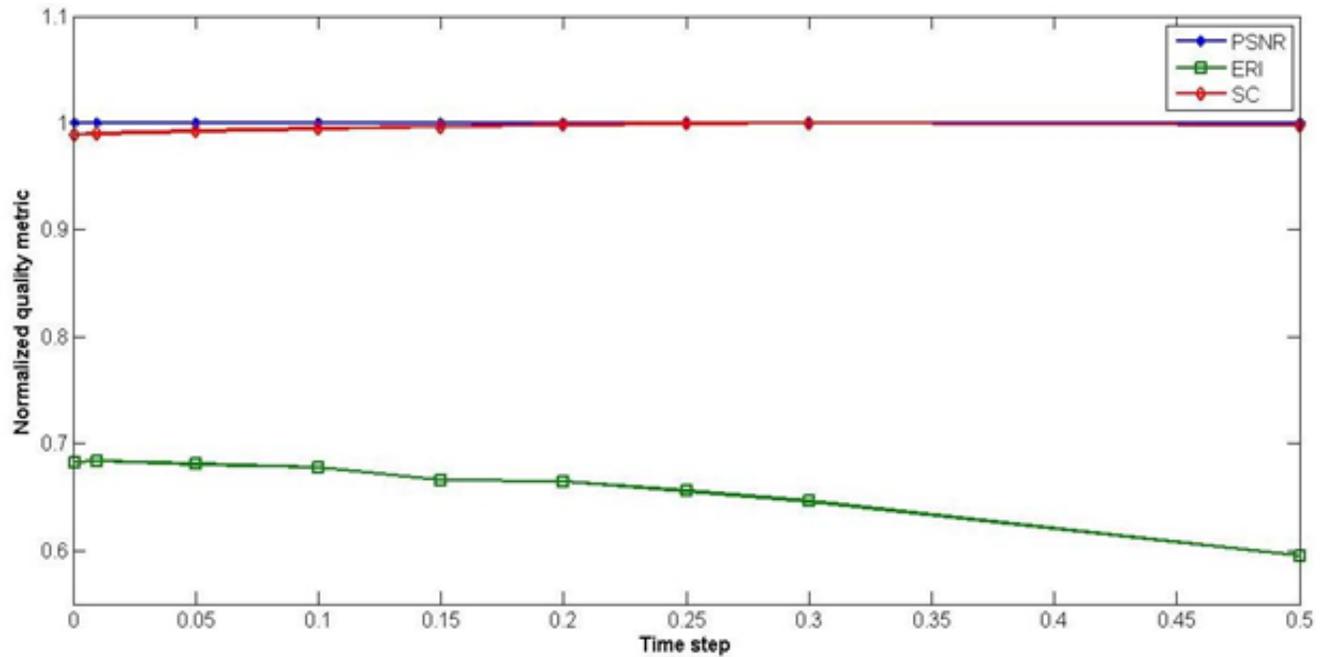


Figure 10. Effect of varying time step on image quality metric in SRAD.

with increase in time step ERI decreases and SC increases. This is illustrated in Figure 10. For time step greater than 0.35, image gets highly blurred and most of the edges get lost.

3.1 Weickert Anisotropic Diffusion

The next anisotropic diffusion filter considered in this study is called Weickert diffusivity function¹⁰ given by-

$$g(x) = 1 - \exp\left[-C_m \left(\frac{x}{\delta}\right)^m\right] \quad \text{for } x > 0$$

$$= 1, \quad \text{otherwise.}$$

(20)

where constant C_m is determined such that flux reaches its maximum at noise threshold δ (Conduction coefficient) and ‘m’ affects the rise time and fall time of the function in the neighborhood of the noise threshold. In this study C_m is fixed at 3.5 and $m = 4^{10}$.

To study the influence of other parameters on performance of Weickert’s anisotropic diffusion filter, initially number of iterations and time step were fixed at 1 and 0.15 respectively while conduction coefficient was increased from 1 to 100. It is observed that there is no significant change in various image quality metrics as in case of Perona and Malik diffusion and SRAD filter. However value of SC is low (as desired) for conduction coefficient greater than 10. Hence for satisfactory transformation conduction coefficient should be greater than 10.

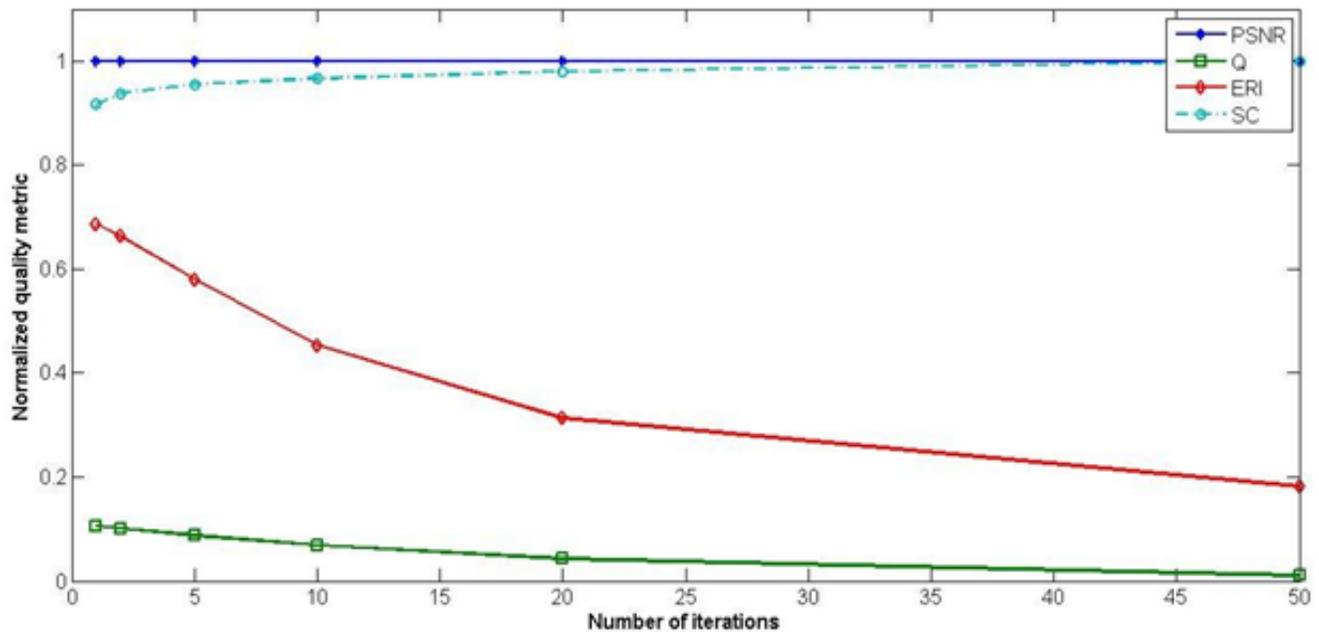


Figure 11. Effect of varying number of iterations on image quality metric in Weickert's anisotropic diffusion.

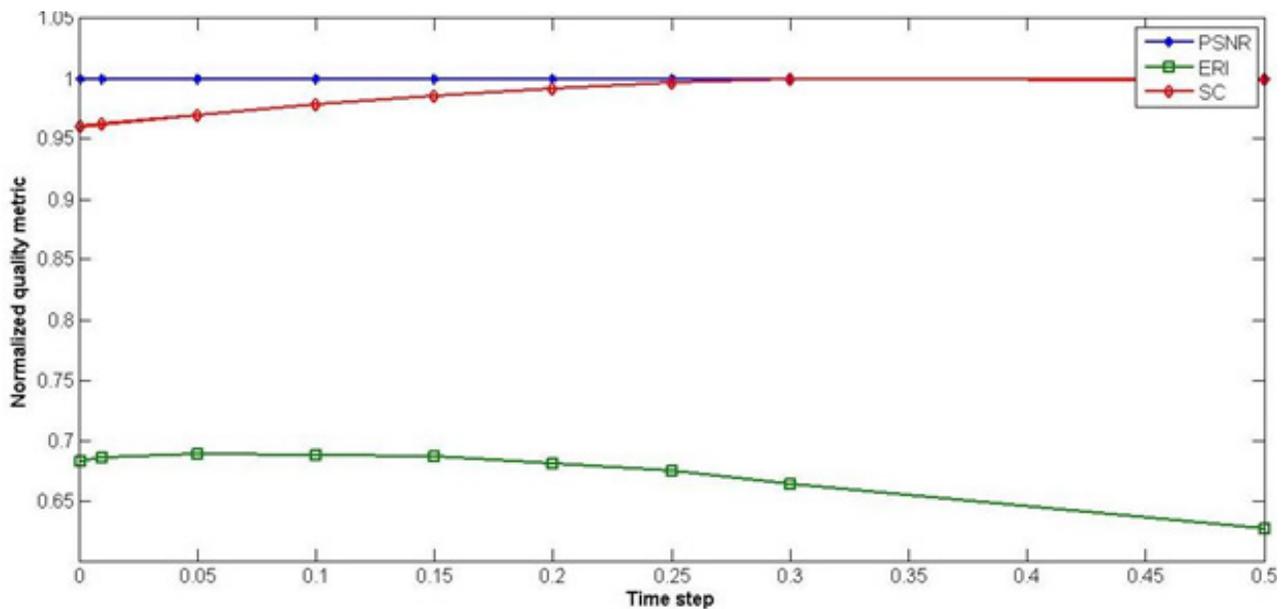


Figure 12. Effect of varying time step on image quality metric in Weickert's anisotropic diffusion.

The effect of varying number of iterations on performance of Weickert's anisotropic diffusion filter. Conduction coefficient and time step were fixed at 30

and 0.15 respectively. It is observed that with increase in number of iterations Q, ERI and SC showed significant variations while PSNR and other quality metrics

remain approximately constant as illustrated in Figure 11. With increase in number of iterations the image gets more smoothed, PSNR remains constant but Q and ERI decreases while SC increases thereby indicating poor transformation. Finally to study the effect of variations in time step on filters performance, the conduction coefficient and number of iterations are fixed at 30 and 1 respectively. It is found that except ERI and SC, no significant variations were observed in other image quality metrics. However with increase in time step ERI decreases and SC increases as illustrated in Figure 12. At time step = 0.25, SC reaches its highest value and ERI reduces drastically which is undesired. Hence for satisfactory transformation time step should be less than 0.25.

3.4 Robust Anisotropic Diffusion

We consider the robust anisotropic diffusion⁶ in which a new edge stopping function based on Tukey's bi weight robust estimator was proposed. Again three parameters namely number of iterations, conduction coefficient and stability factor influence the performance of filter. First

the effect of varying conduction coefficient was analyzed while number of iterations and stability factor are fixed at 20 and 0.15 respectively. With increase in conduction coefficient it is observed that ERI and SC showed significant variations unlike that in other anisotropic diffusion filters. All other image quality metrics except ERI and SC were approximately constant while ERI decreases with increase in conduction coefficient as shown in Figure 13. Thus to retain edges and sharp details conduction coefficient should be less than 10 in case of robust anisotropic diffusion. Figure 14 shows the filtered images for various values of conduction coefficient. It is observed that with increase in value of conduction coefficient image gets more and more smooth and edges get blurred. Next we study the effect of varying number of iterations and time step. With increase in number of iterations and time step no significant variations are observed on various image quality metrics considered in this study. It is found that unlike other types of anisotropic diffusion discussed in this work, in robust anisotropic diffusion conduction coefficient plays critical role in filtering process.



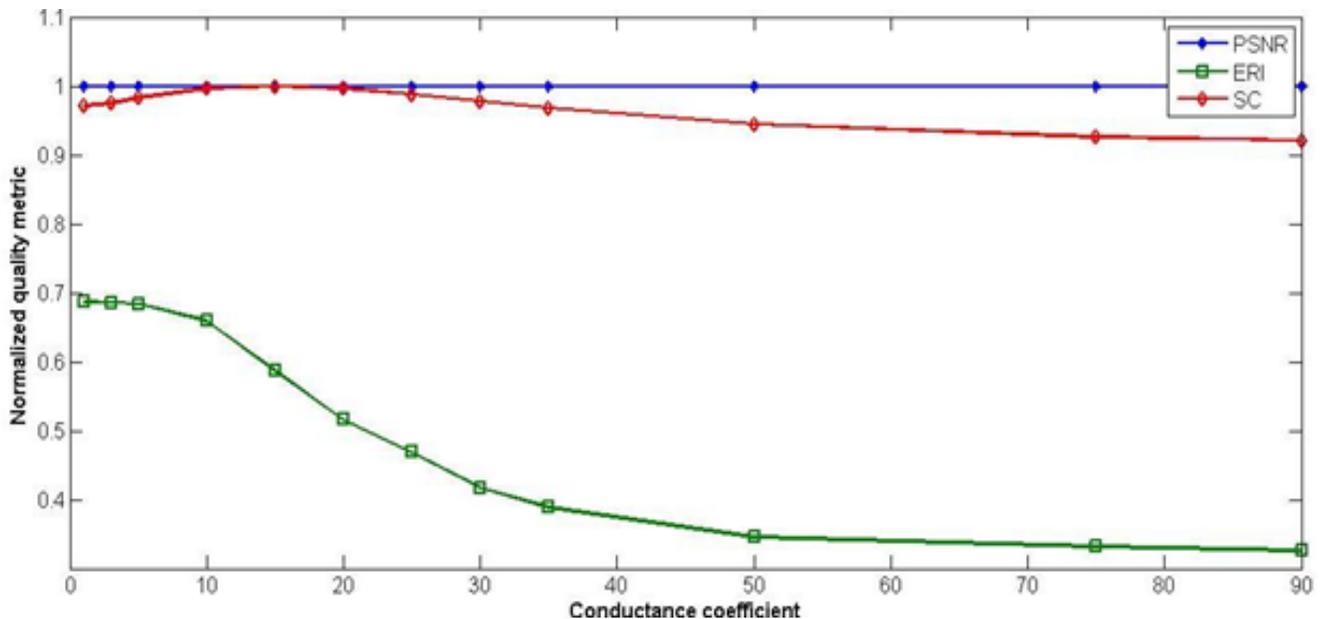



Figure 13. Effect of varying conduction coefficient on image quality metric in robust anisotropic diffusion.

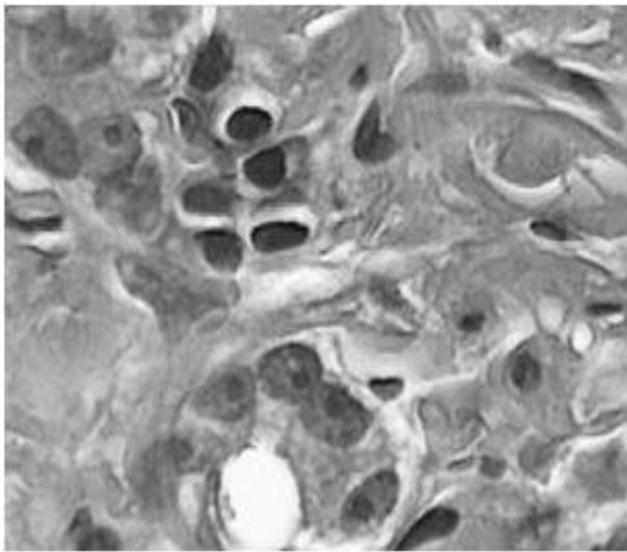


(a)

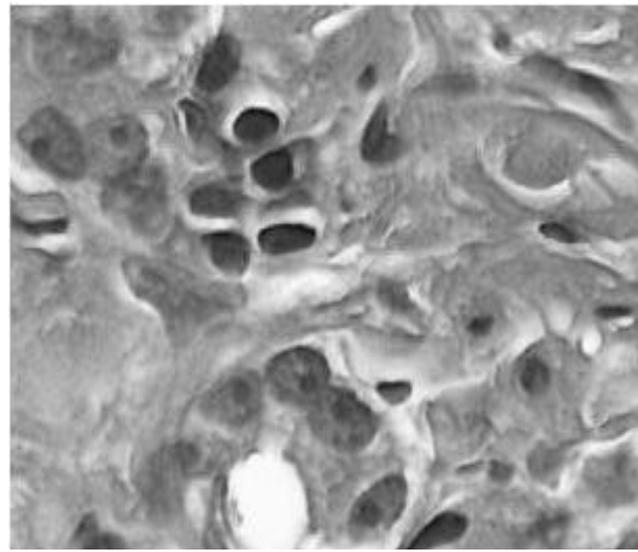

(b)

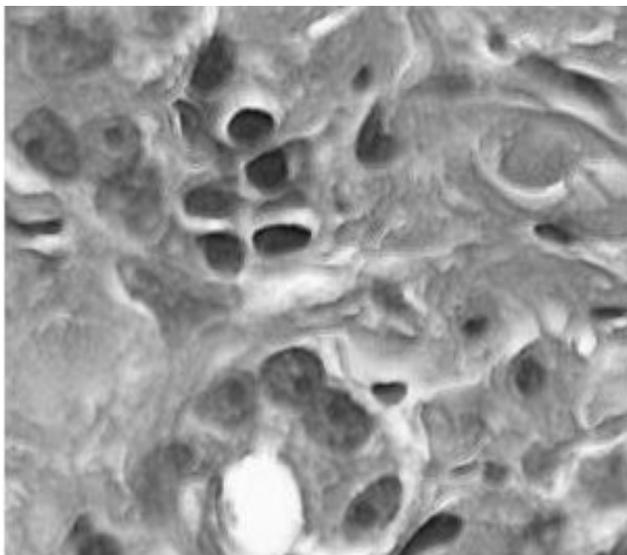

(c)

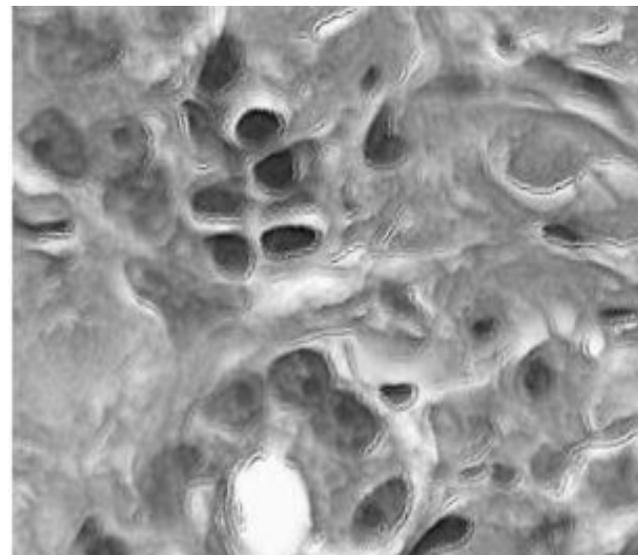

(d)

Figure 8. (a) Filtered image for conduction coefficient = 5 (top left). (b) Conduction coefficient = 15 (top right). (c) Conduction coefficient = 20 (bottom left). (d) Conduction coefficient = 40 (bottom right).

4. Conclusions and Future Scopes

Speckle reduction is an important preprocessing step to improve image quality. Appropriate selection of despeckle filter and associated parameters are very important in enhancement, segmentation and feature extraction of digital images corrupted by speckle noise. Anisotropic diffusion has been successfully used by many researchers for removal of speckle noise. In this paper four most commonly used anisotropic diffusion filters and their associated parameters were analyzed and their individual contribution on performance of filter was studied. Further traditional methods to assess image quality were studied. A new image quality evaluation metric called Edge Retrieval Index (ERI) was used to evaluate edge retaining capability of filter. Experiments were conducted on 25 digital images using MATLAB® software. In Perona and Malik, SRAD and Weickert anisotropic diffusion, the analysis shows that most of the true edges got lost for higher number of iterations along with more smoothening of images. In robust anisotropic diffusion conduction coefficient plays important role in filtering process. Higher value of conduction coefficient results in more smoothening with blurring of sharp details and edges. It is concluded that Q, ERI and SC can give significant information about image quality even in cases where conventional image quality metrics such as PSNR, MSE, RMSE, GAE, LMSE, NAE etc. fail to do so. Combination of these measures may prove more useful in describing image quality. In future this analysis can be carried out on real time images such as medical images. Further visual evaluation by experts may be combined with proposed work method based on quality evaluation metrics to improve the results.

5. References

1. Krissian K, Westin CF, Kikinis R, Vosburgh KG. Oriented speckle reducing anisotropic diffusion. *IEEE Transactions on Image Processing*. 2007 May; 16(5):1412–24. CrossRef. PMID:17491469
2. Perona P, Malik J. Scale space and edge detection using anisotropic diffusion. *IEEE Transactions on Pattern Analysis and Machine Intelligence*. 1990 Jul; 12(7):629–39. CrossRef.
3. Gu Y, Yu X, Cui Z, Wang L, Xiu C. Detail preserving despeckling under multiscale anisotropic diffusion in medical ultrasound images. *Proc 4th International Conference on Biomedical Engineering and Informatics*; 2011. p. 245–9. CrossRef.
4. Nordstrom KN. Biased anisotropic diffusion- A unified regularization and diffusion approach to edge detection. *Image and Vision Computing*. 1990; 8:318–27. CrossRef.
5. Weickert J. *Anisotropic diffusion in image processing*. Stuttgart, Germany: Teubner; 1998. p. 1–184.
6. Black MJ, Sapiro G, Marimont DH, Marimont, Heeger D. Robust anisotropic diffusion. *IEEE Transactions on Image Processing*. 1998 Mar; 7(3):421–32. CrossRef. PMID:18276262
7. You YL, Xu W, Tannenbaum A, Kaveh M. Behavioral analysis of anisotropic diffusion in image processing. *IEEE Transactions on Image Processing*. 1996 Nov; 5(11):1539–53. CrossRef. PMID:18290071
8. Yu Y, Acton S. Speckle reducing anisotropic diffusion. *IEEE Transactions on Image Processing*. 2002 Nov; 11(11):1260–70. CrossRef. PMID:18249696
9. Loizou CP, Pattichis CS, Christodoulou CI, Istepanian RSH, Pantziaris M, Nicolaidis A. Comparative evaluation of despeckle filtering in ultrasound imaging of the carotid artery. *IEEE Transactions on Ultrasonics, Ferroelectrics and Frequency Control*. 2005 Oct; 52(10):1653–69. CrossRef. PMID:16382618
10. Weickert J, Romeny BMTH, Viergever MA. Efficient and reliable schemes for non linear diffusion filtering. *IEEE Transactions on Image Processing*. 1998 Mar; 7(3):398–410. CrossRef. PMID:18276260
11. Gerig G, Kubler O, Kikinis R, Jolesz FA. Nonlinear anisotropic filtering of MRI data. *IEEE Transactions on Image Processing*. 1992 Jun; 11(2):221–32. CrossRef. PMID:18218376
12. Lee JS. Speckle suppression and analysis for synthetic aperture radar. *Opt Eng*. 1986; 25:636–43. CrossRef.
13. Frost VS, Stiles JA, Shanmugam KS, Holtzman JC. A model for radar images and its application to adaptive digital filtering of multiplicative noise. *IEEE Transactions on Pattern*

- Analysis and Machine Intelligence. 1982 Mar; 4(2):157–65. CrossRef.PMid:21869022
14. Ham B, Min D, Sohn K. Revisiting the relationship between adaptive smoothing and anisotropic diffusion with modified filters. *IEEE Transactions on Image Processing*. 2013 Mar; 22(3):1096–107. CrossRef. PMid:23193236
 15. Singh BK, Verma K, Thoke AS. Objective and optical evaluation of despeckle filters in breast ultrasound images. *IETE Technical Review*; 2015. p. 1–15. CrossRef.
 16. Canny J. A computational approach to edge detection. *IEEE Transactions on Pattern Analysis and Machine Intelligence*. 1986 Nov; 8(6):679–98. CrossRef. PMid:21869365
 17. Loizou CP, Pattichis CS, Pantziaris M, Tyllis T, Nicolaidis A. Quality evaluation of ultrasound imaging in the carotid artery based on normalization and speckle reduction filtering. *Med Biol Eng Comput*. 2006 Apr; 44:414–26. CrossRef. PMid:16937183
 18. Mateo JL, Caballero AF. Finding out general tendencies in speckle noise reduction in ultrasound images. *Expert Systems with Applications*. 2009; 36:7786–97. CrossRef.
 19. Kim HS, Yoo JM, Park MS, Dinh TN, Lee GS. An anisotropic diffusion based on diagonal edges. *Proc ICACT*; 2007. p. 384–8. CrossRef.
 20. Wang Z, Bovik AC, Sheikh HR, Simoncelli EP. Image quality assessment: From error visibility to structural similarity. *IEEE Transactions on Image Processing*. 2004 Apr; 13(4):600–12. CrossRef.PMid:15376593
 21. Eskicioglu AM, Fisher PS. Image quality measures and their performance. *IEEE Transactions on Communications*. 1995 Dec; 43(12):2959–65. CrossRef.