

Design and Optimization of Critical Parameters of a Muffler for Noise Reduction

R. Praveen kumar¹, M. Sasikumar^{1*} and S. Dinesh Kumar²

¹School of Mechanical and Building Sciences (SMBS), VIT University, Chennai Campus, Chennai – 600127, Tamil Nadu, India; Praveen.kumar2013@vit.ac.in, sasikumar.m@vit.ac.in

²Department of Automobile Engineering, Karpaga Vinayaga College of Engineering and Technology, Chennai - 600024, Tamil Nadu, India; softdin@gmail.com

Abstract

Objective: The main aim of this paper is redesigning Muffler internal layout to improve the attenuation based on the critical parameters. Analyzing the baseline muffler design, the area of improvement is identified as frequency range of 250Hz–800Hz. **Methods:** By keeping the volume of muffler constant and varying the critical parameters such as perforation size, length of perforations on the pipe, length of intermediate pipes and the position of baffles thirty iterations were performed. **Finding:** The exhaust gas flow path was modified in the new concept for better attenuation. Second and fourth chambers were made as expansion chambers. First and third chambers were made as Helmholtz chambers. With this basic flow path, further fine tuning was done by varying the critical parameters. **Applications:** With this current design and optimistic characteristic, the candidate's muffler design can be used as noise reduction muffler in automobile industries.

Keywords: Acoustics, Muffler, Sensitivity Analysis, Transmission Loss

1. Introduction

The muffler or silencer is a device used for attenuation of noise emitted by exhaust of an IC Engine¹. Noise emitted by vehicles is regulated based on PBN test which includes noise from different sources like exhaust, gearbox, engine, tyres, etc. Higher noise causes discomfort in public, passengers and driver. Undoubtedly, lesser noise can make the environment friendlier. To reduce the intensity of sound emitted out of vehicle from exhaust, muffler is a primary means which has to be engineered to attenuate noise meeting required dB levels and sound quality, emissions based on environment norms.

A muffler may be described as any section of duct pipe that has been shaped or treated with the intention of reducing the transmission of sound, while at the same time allowing free flow of a gas²⁻⁴. Mufflers are made up of reactive and resistive elements. Mufflers perform the silencing function by absorption, restriction and reflection

methods. Mufflers can use one, a combination or all of these methods to attenuate sound⁵. Mufflers are conventionally classified as dissipative or reactive, depending on whether the acoustic energy is dissipated into or is reflected back by area discontinuities⁶. Noise, Vibration and Harshness performance relate to the vibrational response of the vehicle to driving conditions. As such, stiffness of the vehicle structure, the mass of the vehicle, and the damping effects of the vehicle suspension all come into play⁷.

GT-POWER is the market leading Engine Simulation Software, used by every major Engine manufacturer for the design and development of their Engines. GT-POWER includes a complete After treatment(AT) device library that enables to model any AT device in isolation or within an integrated system, while providing the user the complete flexibility to modify and impose the participating kinetic mechanisms. It is a single tool for simulation of all aspects of Engine and vehicle sys-

*Author for correspondence

tems and it allows modeling of AT systems together with the vehicle, Engine, thermal management, and control systems, making this tool uniquely suitable for collaborative development. GEM3D is a tool that can be used to build 3D models of flow systems that can be discretized and made into model files for use with GT-SUITE. GEM3D can be used to build any flow system that contains only flow components like pipes, mufflers, manifolds, air boxes, etc.

Figure 1 shows an acoustical model of the baseline muffler created in GT-power for simulation of transmission loss values.

Acoustical filter performance parameters

A typical Exhaust Muffler or a Low-pass Acoustic Filter with its terminations is shown in Figure 2. Invariably, the muffler has a small diameter pipe on either end. The one upstream is called the exhaust pipe and that downstream is called the tail pipe. The middle, larger diameter portion may be called the muffler proper. In general, for a n-element muffler, the tail pipe would be the first element and the exhaust pipe, the nth. The performance of an acoustic filter is measured in terms of the parameters, Insertion loss, IL; Transmission loss, TL; and Level difference, LD or Noise reduction, NR.

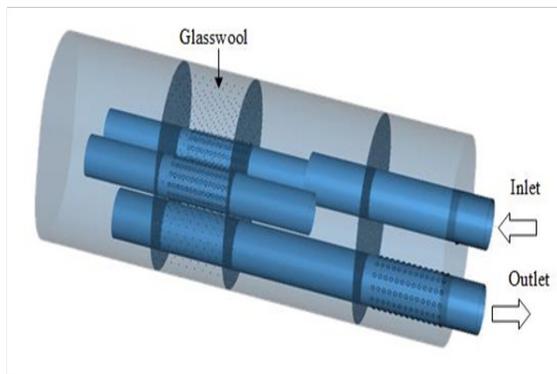


Figure 1. Baseline Design.

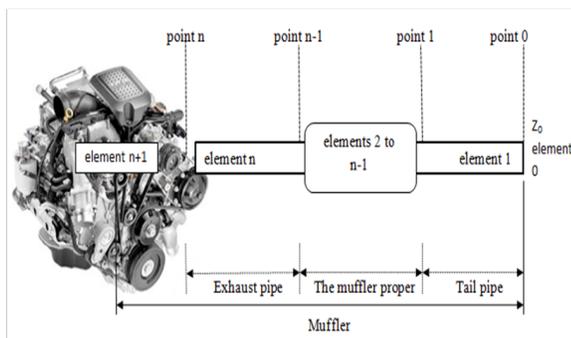


Figure 2. Typical engine exhaust system.

2. Experiments and Methods

The baseline muffler design consists of four chambers, two expansion chambers and two Helmholtz chambers⁸. An absorption chamber with glass wool is used to attenuate high frequency noise. An acoustical model of the baseline muffler was created in GT-power Figure1: and simulated for transmission loss values. Figure 3 shows the transmission loss curve for the baseline muffler.

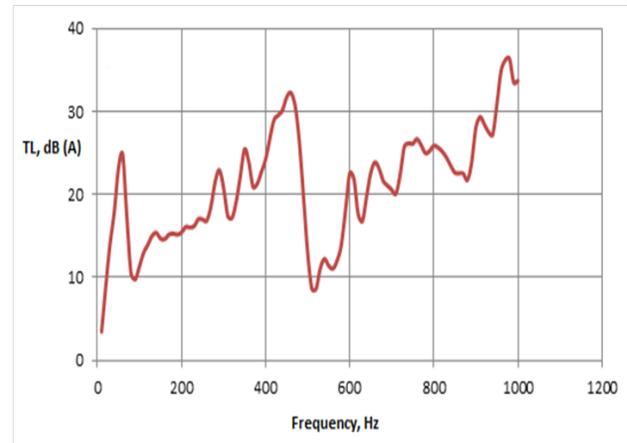


Figure 3. TL curve of the baseline muffler.

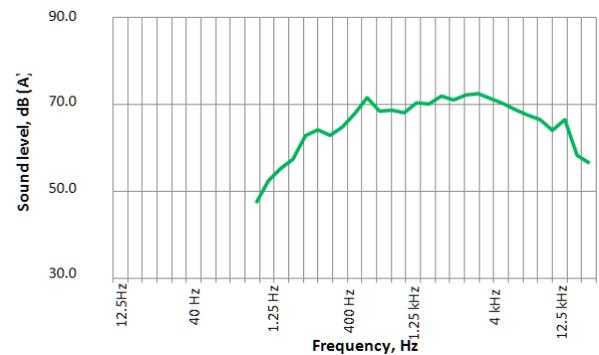


Figure 4. PBN spectrum of the baseline muffler– driver side.

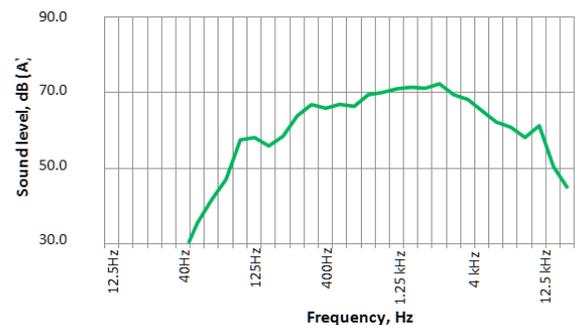


Figure 5. PBN spectrum of the baseline muffler– codriver side.

PBN SPECTRUM: PBN trials were carried out on a 180hp vehicle. The PBN spectrum indicates that, improvement is needed in the frequency range of 250Hz–800Hz as shown in Figure 4.

PBN trial includes both driver side and co-driver spectrum values. The PBN

spectrum of the baseline muffler with co-driver side can be seen in Figure 5.

3. Result and Discussion

3.1 Sensitivity Analysis

3.1.1 Effect Of Perforations (Hole Diameter)

Perforation size, perforation length and open area ratio (ratio of the total area of perforations to the cross sectional area of the pipe) play a major role in designing the Helmholtz chamber⁹⁻¹¹. One of the critical factors is perforation size. Different perforation size for different case consider in this work is shown in Table 1. Open area ratio 1.1 is maintained constant in all the models.

Three different perforation sizes 3mm, 4mm and 5mm are cornered. Out of three combinations, perforations of 5mm in both inlet and outlet pipes are finalized based on Transmission Loss comparisons. By maintaining the same open area ratio, three different perforation sizes were simulated and the performance of 5mm perforation diameter gave better attenuation as shown in the Figure 6.

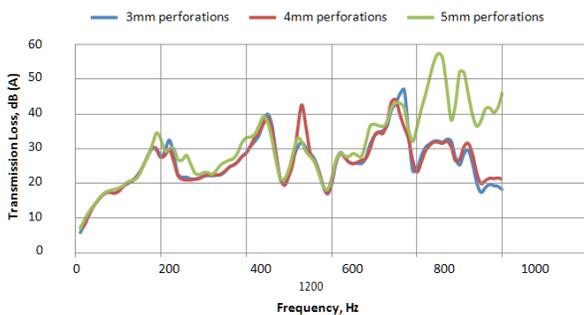


Figure 6. Effect of perforation diameter on performance.

Table 1. Diameter of Perforations

CASEI	Inlet pipe perforation 3mm	Outlet pipe perforation 3mm
CASEII	Inlet pipe perforation 4mm	Outlet pipe perforation 4mm
CASEIII	Inlet pipe perforation 5mm	Outlet pipe perforation 5mm

3.1.2 Effect of Baffle Position

In Expansion chamber mufflers, larger the expansion ratio the greater the transmission loss¹². Different baffle position for different case consider in this work is shown in Table 2.

From above three cases, we observe that 5mm hole diameter on both inlet and outlet pipes with tuned second expansion chamber (215 mm length) affects transmission loss relatively high when compared to first expansion chamber and second expansion chamber with 195mm length. Chamber length of 195mm is not considered because of high back pressure. By maintaining the muffler volume same, results were observed by tuning the first expansion chamber and second expansion chamber with different chamber lengths in Figure 7. Second expansion chamber length 215mm has a relatively high transmission loss compared to first expansion chamber of length 180 mm.

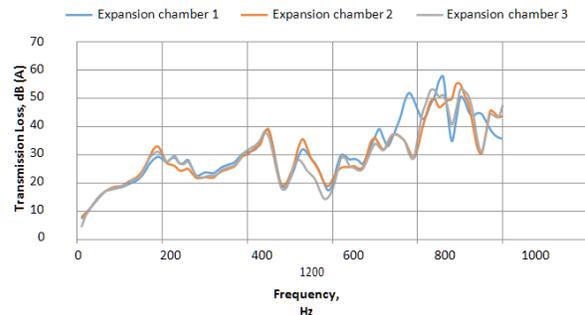


Figure 7. Effect of baffle position on performance.

Table 2. Baffle position

CASEI	Second chamber tuning (first expansion chamber)	Two Helmholtz chamber length as constant
CASEII	Fourth chamber tuning (second expansion chamber)	First expansion chamber and two Helmholtz chamber length as constant
CASEIII	Second expansion chamber tuning	First and second chambers length as constant

3.1.3 Effect of Intermediate Pipelength

One of the critical parameters affecting the performance characteristics of the muffler is the length of intermedi-

ate pipe¹³. In concept 1, intermediate pipe length is varied and a simulation was made. Different pipe length for different case consider in this work is shown in Table 3.

It is observed that the tuning of intermediate pipes shows considerable variation in transmission loss values. In the low frequency range, all the models performed same. In the frequency range of 580Hz to 840Hz intermediate pipe 2 shows a better transmission loss compared to other models. Results are plotted as shown in Figure 8.

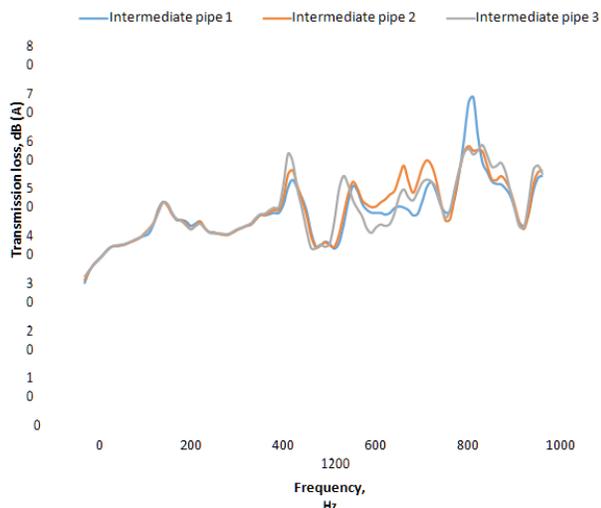


Figure 8. Effect of intermediate pipe length.

Table 3. Intermediate pipe length

CASEI (Figure 6.10)	Diameter of Intermediate pipes as constant	Intermediate pipe length located in Helmholtz chamber is reduced to 190mm
CASEII (Figure 6.11)		Intermediate pipe length located in Helmholtz chamber is reduced to 250mm
CASEIII (Figure 6.12)		Intermediate pipe length located in Helmholtz chamber is reduced to 215mm

3.2 Concepts Finalization

The concepts finalized from the sensitivity analysis are listed in the table 4.

From the analysis done using GT-SUITE software, the overall Transmission Loss graph was plotted by observing the effect of critical parameters which affects the performance characteristics of Exhaust Muffler. In comparison, it is clear that, conceptually with 5mm perforation diameter on both inlet and outlet pipes showed better performance when compared to others. The effect of parameters was further made in Concept 2 and the designs which performed better Transmission Loss were selected for experimental testing.

From PBN spectrum, peak is observed at 315Hz and need to be reduced with the new muffler design. New Concepts were finalized by keeping in mind that the performance should be improved at the frequencies of 315&500Hz and also an improvement in performance at first order (120Hz) will be very useful.

The overall Transmission Loss result for the finalized concepts are plotted is shown in Figure 9.

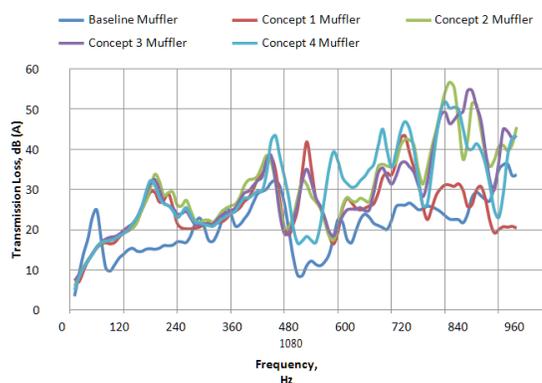


Figure 9. Overall Transmission Loss value.

Table 4. Concept finalization

CONCEPT 1	4mmperforation diameter on both Inlet and Outletpipes.
CONCEPT 2	5mmperforation diameter on both Inlet and Outletpipes.
CONCEPT 3	5mm perforation diameter on both inlet and outlet pipes with tuned second expansion chamber.
CONCEPT 4	5mmperforation diameter on both inlet and outlet pipes with intermediate pipe length reduction.

4. Conclusion

1. The need for design verification will always be necessary at the end of each step, although the prac-

tical approach has become an important tool. This approach serves the purpose of reducing the number of iterations, product development time and cost with better design.

2. After verifying the effect of critical parameters, new Mufflers were developed to clear back pressure and PBN targets after transmission loss test in laboratory level. Improvements in the performance of the Mufflers help in reducing the number of noise shields.
3. Mufflers with dedicated chambers for expansion and Helmholtz resonator are better in performance compared to the Mufflers with a combination of the chambers. Higher perforation size helps in attenuating low frequency and vice versa. Longer the chamber length better is the attenuation at low frequency.
4. The finalized concept Mufflers have shown improvement in performance at the frequencies of 315&500 Hz. In comparison, it is clear that, conceptually with 5mm perforation diameter on both inlet and outlet pipes showed better performance when compared to other concepts and the experimental result has been correlated with the analytical result.

5. Scope of Future Work

By optimizing all the critical parameters, new mufflers were designed and transmission loss analysis was performed to compare the performance of other concept mufflers. Analyzing the new muffler concepts, concept2 mufflers shows higher transmission loss and improvement in the frequency range of 250Hz–800Hz compares with baseline muffler and other concept mufflers which can reduce the noise peaks at problematic frequencies 315Hz and 500Hz respectively. Pass-by Noise test for the new developed muffler (concept 2 mufflers) is suggested.

5. References

1. Munjal ML. Acoustics of ducts and Mufflers with Applications to Exhaust and Ventilation System Design, 1st(edn). Wiley-Inter science: US. 1987; 1–328.
2. Potente P, Daniel D. General Design Principles for an Automotive Muffler. Proceedings of acoustics Australian Acoustical Society, Western Australia. 2005; 1–6.
3. Sherekar V, Dhamangaonkar PR. Design Principles for an Automotive Muffler. International Journal of Applied Engineering Research. 2014; 9(4):483–89.
4. Rahman M, Sharmin T, Hassan AFE, Al Nur M. Design and Construction of a Muffler for Engine Exhaust Noise Reduction. Proceedings of the International Conference on Mechanical Engineering. Dhaka, Bangladesh. 2005; 11(3):85–91.
5. Vaidya PPV, Hujare H. Optimization of Sound Pressure Level of Air Intake System by using GT-Power. International Journal of Emerging Science and Engineering. 2014; 2(8):9–11.
6. Tao Z, Seybert AF. A Review of Current Techniques for Measuring Muffler Transmission Loss. Society of Automotive Engineers. 2003; 1–5.
7. Kim KS, Choi DS. Study on Vibration Characteristics through Torsion Spring Constants within Automobile Muffler. Indian Journal of Science and Technology. 2015 Jan 1; 8(S1):210–5.
8. Pal S, Golan TS, Kumar V, Jain V, Ramdas N, Sharma OP. Design of a Muffler and Effect of Resonator length for 3 Cylinder SI Engine. IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE). 2014; 11(3):1–7.
9. Allam S. Numerical Assessment and Shape Optimization of Dissipative Muffler and Its Effect on I.C. Engine Acoustic Performance, American Journal of Vehicle Des. 2014; 2(1):22–31.
10. Pujari NV, Mahajan SR, Mohite YB. Optimization of Silencer- An Integrated Approach of Acoustic Performances and Back pressure. International Journal of Emerging Science and Engineering. 2013; 3(22):1–3.
11. Shah S, Sasisankaranarayana K, Kalyankumar S, Hatti H, Thombare DG. A Practical Approach towards Muffler Design, Development and Prototype Validation, SAE International. 2010; 1 – 11.
12. Gopan MB, Annamalai K. Optimizing the Back Pressure of 4 Stroke Engine by using Baffle Plates in Tail Pipe. Indian Journal of Science and Technology. 2015 Nov; 8(31):1–6.
13. Lou H, Tse C, Chen YNC. Modeling and Applications of Partially Perforated Intruding Tube Mufflers. Applied Acoustics. 1995; 44(4):99–116.